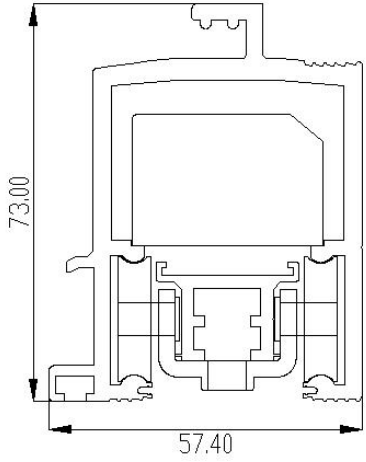
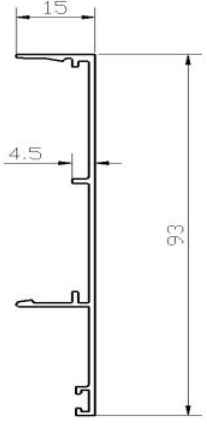

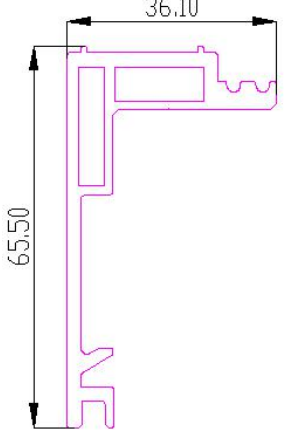
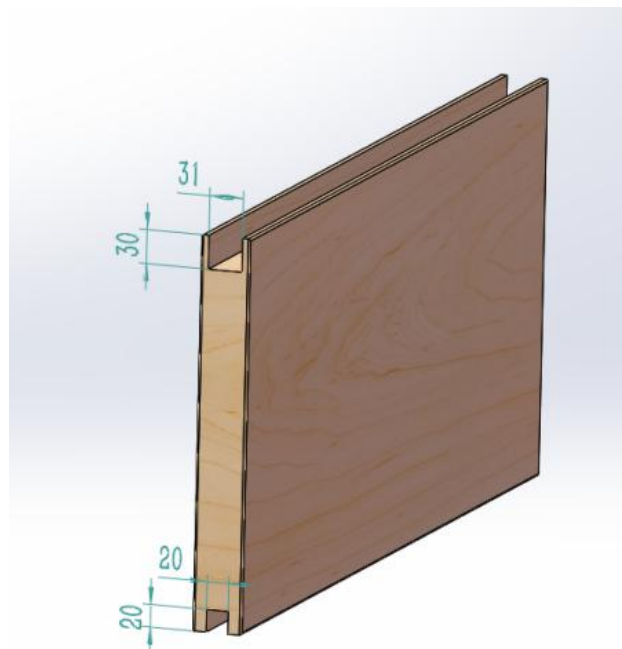


58*76 Single-track wooden pocket door installation instructions

1.Profile introduction




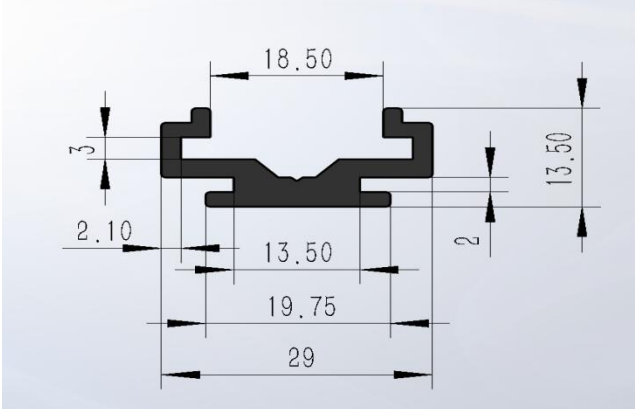

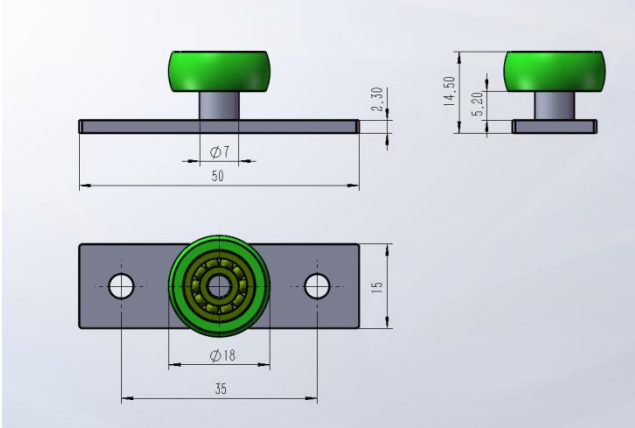
Track	Cover plate	Anti-swing wheel channel steel	Embedded parts
			

2.Door panel view





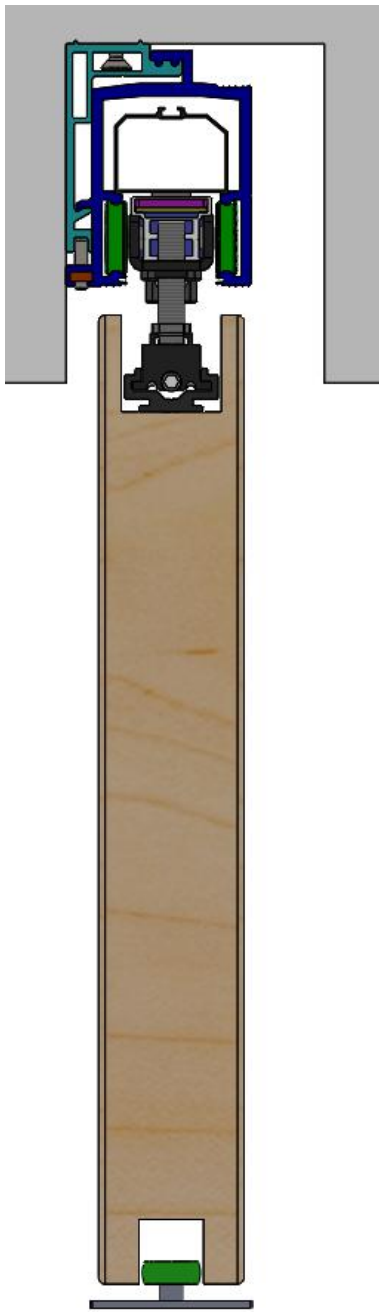



Wooden door


3.Accessory

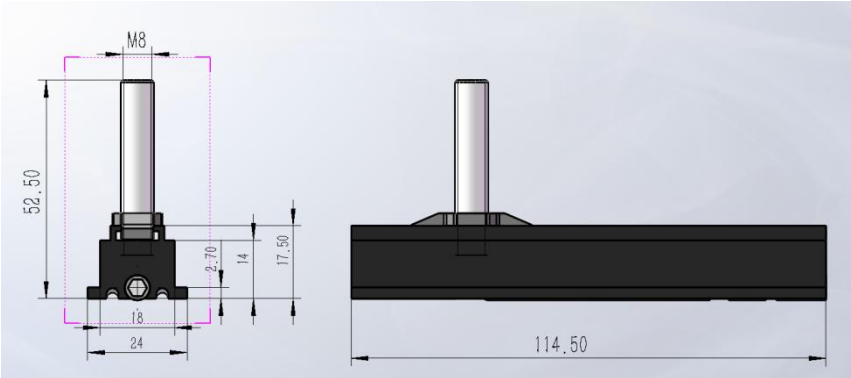 <p>25 Upper load-bearing hanger</p>	 <p>Technical drawing of the 25 Upper load-bearing hanger. The front view shows a base with a width of 24 mm and a height of 52.50 mm. The base has a central hole with a diameter of 18 mm. The hanger has a height of 17.50 mm and a width of 114.50 mm. The side view shows a base with a width of 18 mm and a height of 2.70 mm. The hanger has a height of 14 mm and a width of 114.50 mm. The hanger has a central hole with a diameter of 18 mm and a thread of M8.</p>
 <p>25 Base</p>	 <p>Technical drawing of the 25 Base. The front view shows a base with a width of 29 mm and a height of 13.50 mm. The base has a central hole with a diameter of 13.50 mm. The side view shows a base with a width of 18.50 mm and a height of 13.50 mm. The base has a central hole with a diameter of 13.50 mm and a thread of M8.</p>
 <p>Anti-swing wheel</p>	 <p>Technical drawing of the Anti-swing wheel. The front view shows a base with a width of 50 mm and a height of 2.30 mm. The base has a central hole with a diameter of 7 mm. The side view shows a base with a width of 14.50 mm and a height of 5.20 mm. The base has a central hole with a diameter of 18 mm and a thread of M8.</p>


4.Installation mode

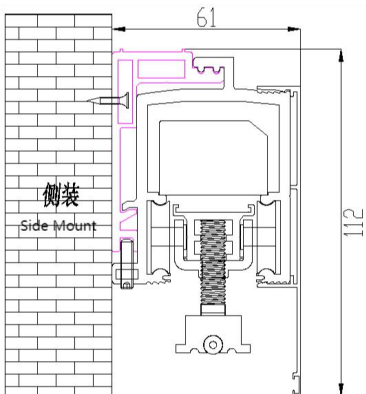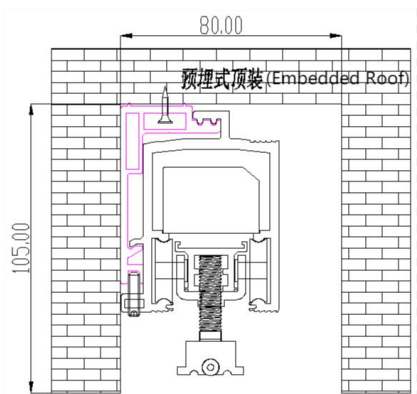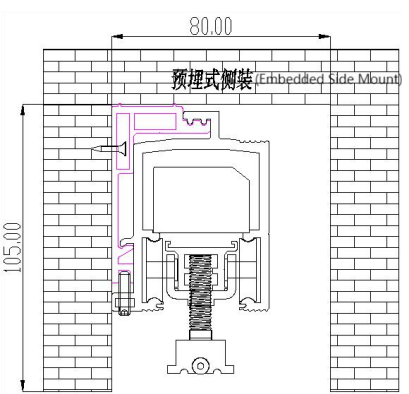		
		
<p>Side mounting diagram</p>	<p>Schematic diagram of embedded top mounting</p>	<p>Schematic diagram of embedded side mounting</p>


4.1 Fix embedded parts

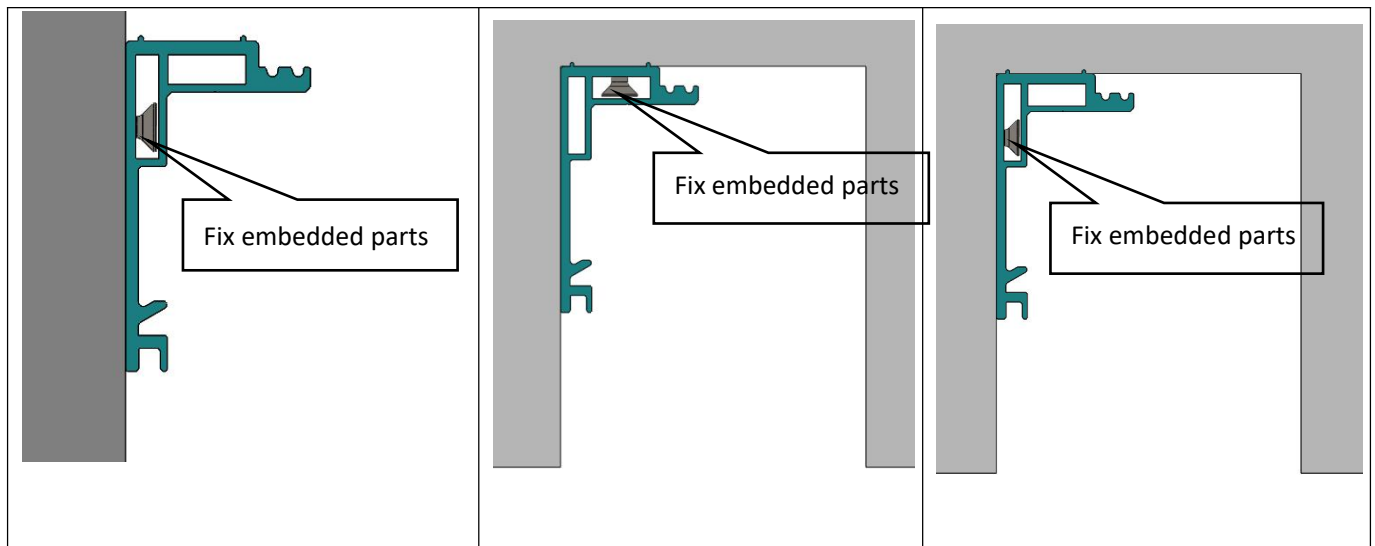

4.2 Disassembly and assembly track

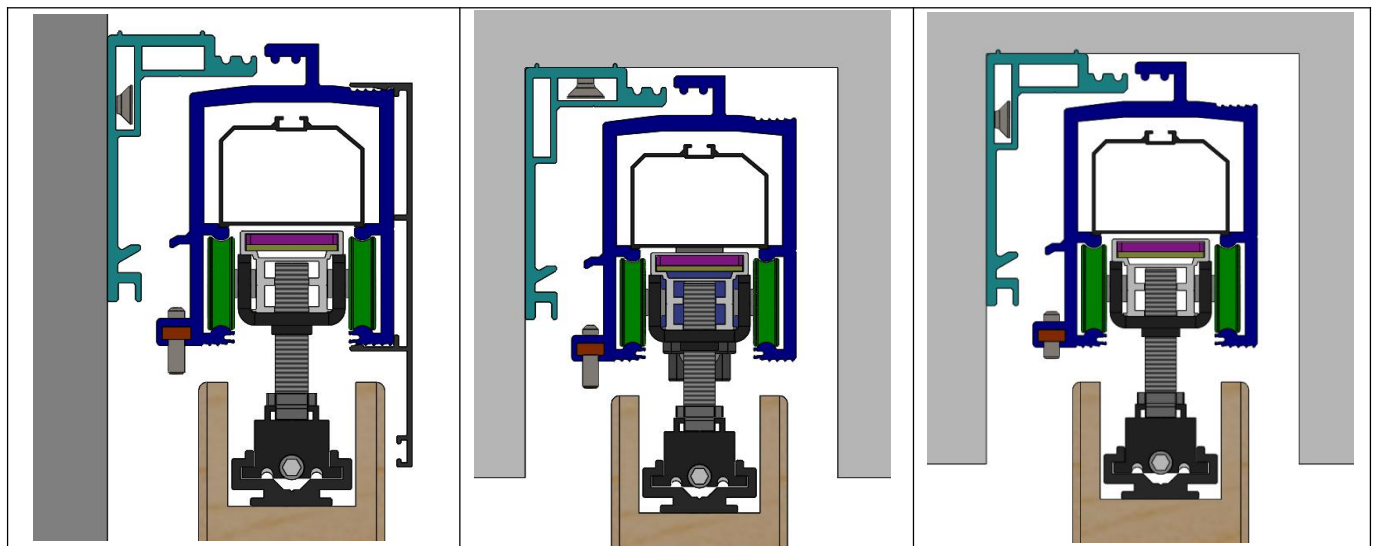

4.3 Fix the track

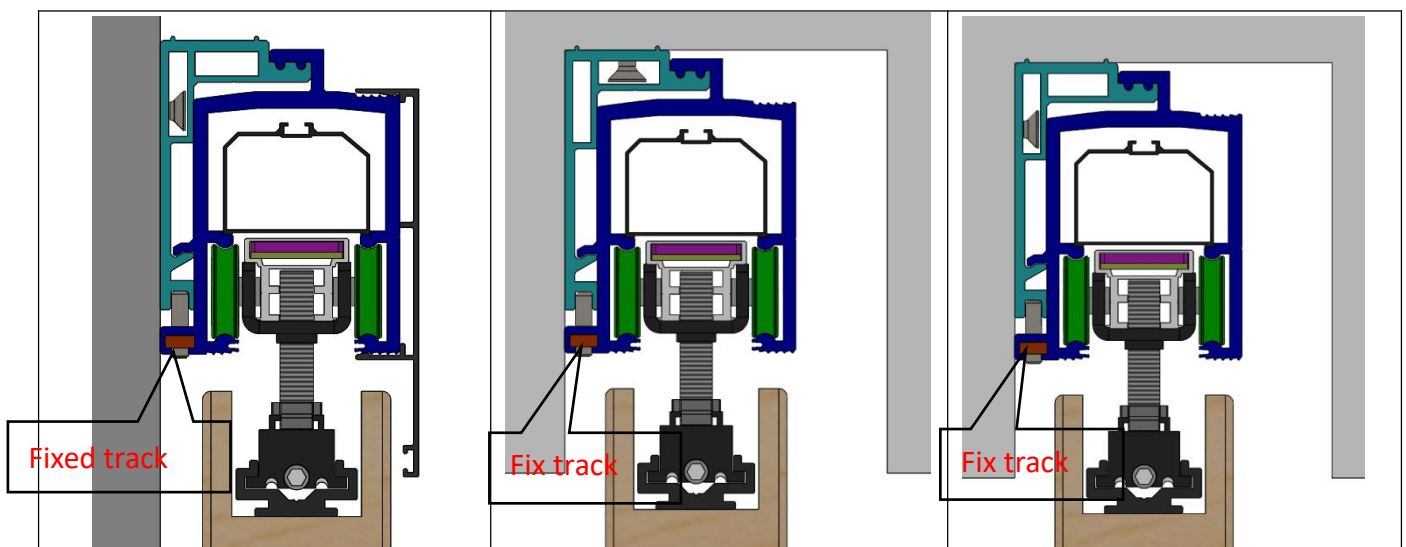

5. Installation parameters

